IPad mini2 3G to WiFi

R1204 can be removed directly with tweezers or soldering iron (if the resistor is removed, it can't be turned on and the machine can be swiped). If some versions don't have r1205, you need to short-circuit it, open the computer, connect to iTunes, call WiFi version data, and the machine can be swiped

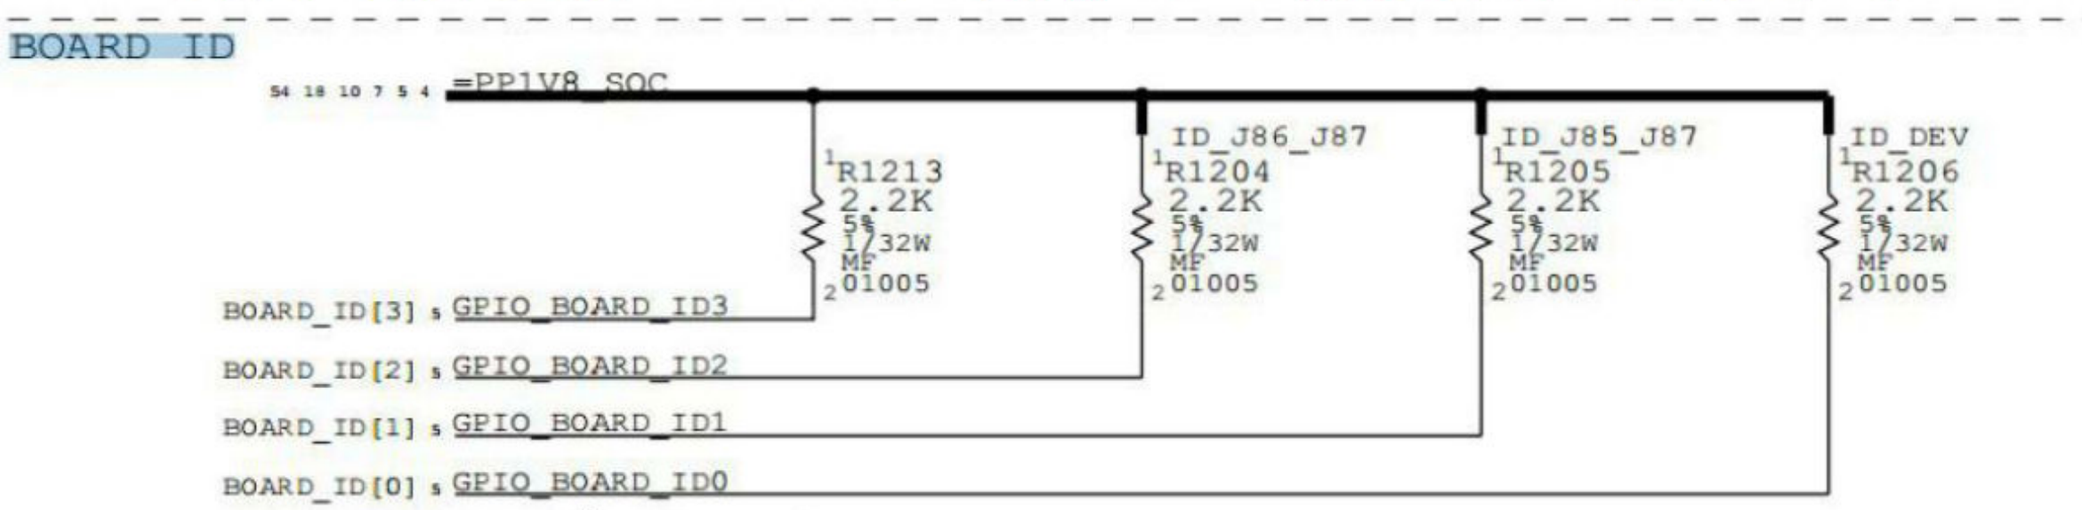

	ID[3-0]	SYSTEM	
MLB	1010	J85	AP
	1011	J85	DEV
MLB_B	1100	J86	AP
	1101	J86	DEV
MLB_C	1110	J87	AP
	1111	J87	DEV

S/W READ FLOW
1. SET GPIO AS INPUT
2. DISABLE PU AND ENABLE PD
3. READ

