IPad air 3G to WiFi

R1506 can be directly removed with tweezers or soldering iron. (if you don't turn on the machine after removing the resistance, just swipe the machine.) open the computer, connect to iTunes, call the WiFi version data, and swipe the machine

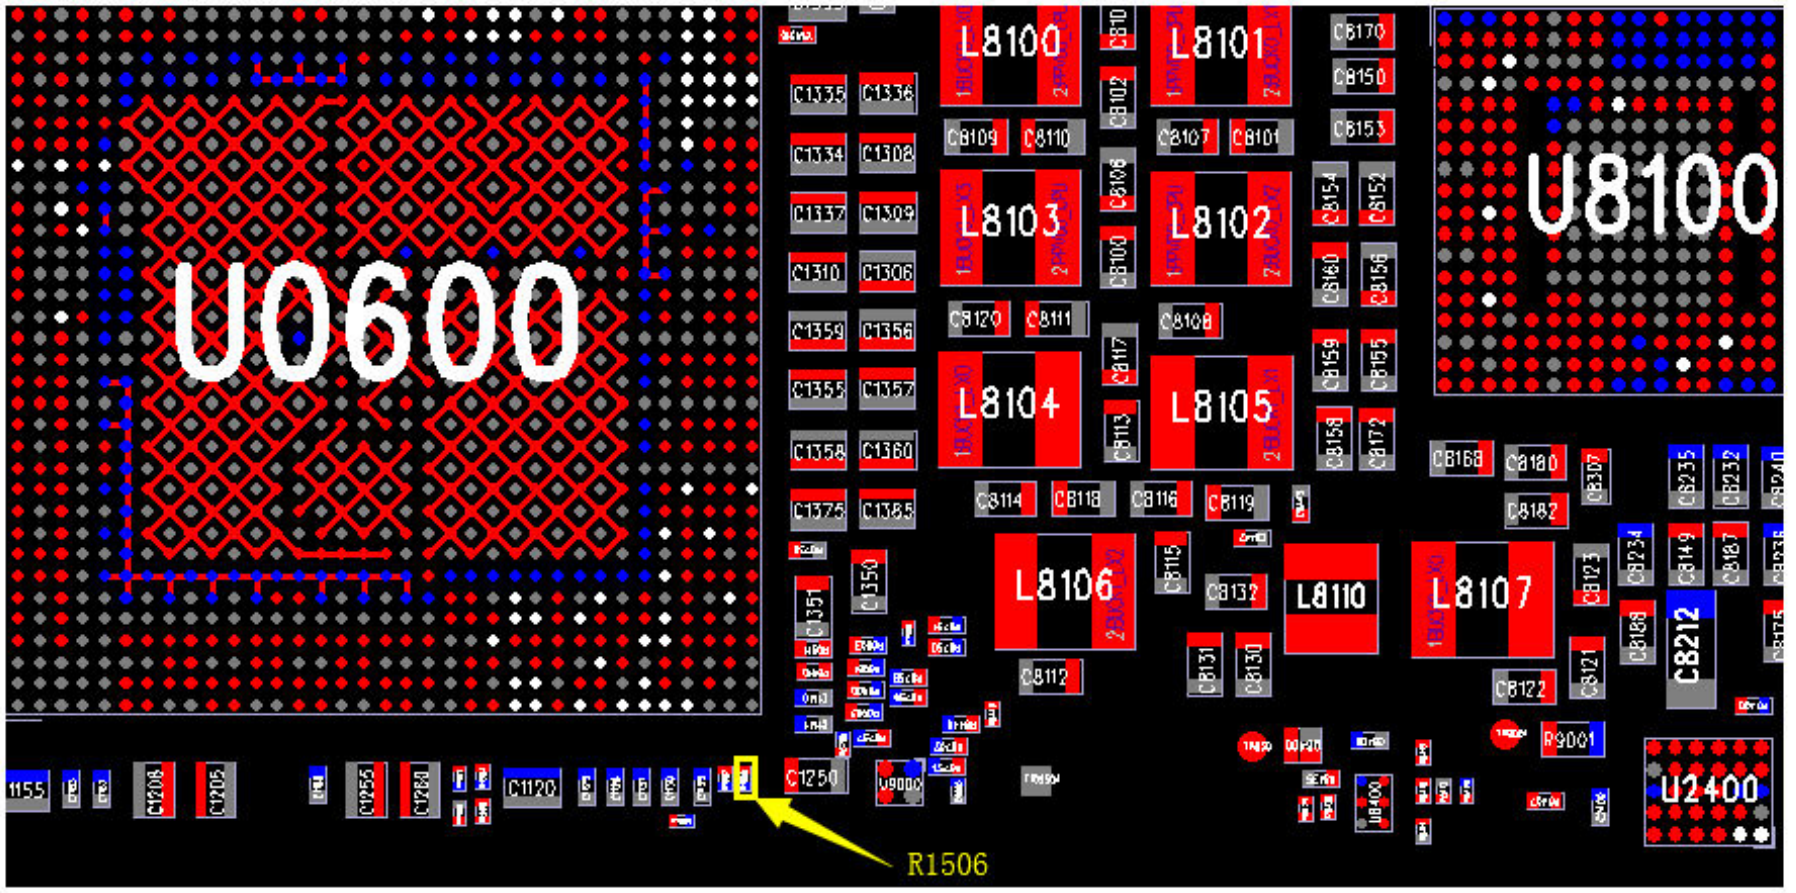

BOARD ID

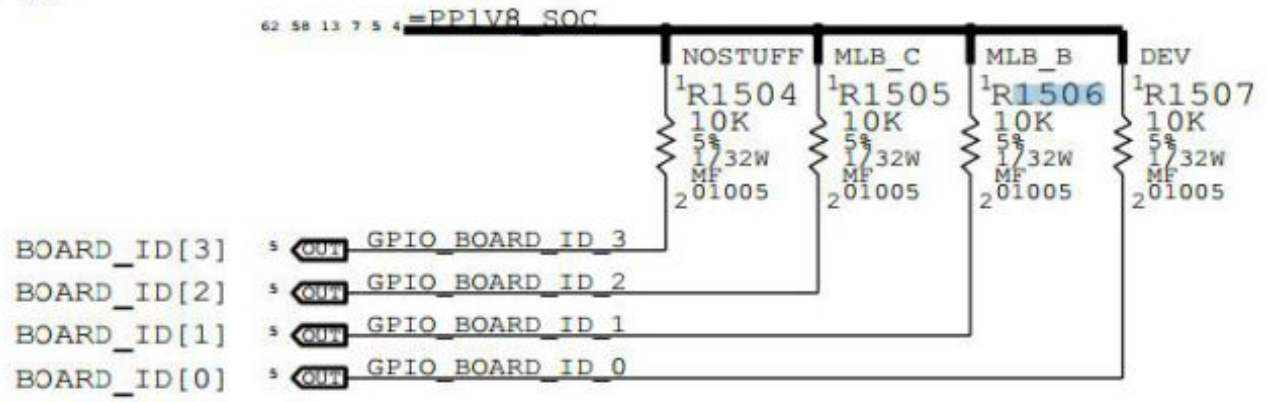

BOARD_ID[3-0]	
0000	MLB_A AP
0001	MLB_A DEV
0010	MLB_B AP
0011	MLB_B DEV
0100	MLB_C AP
0101	MLB_C DEV

S/W READ FLOW

1. SET GPIO AS INPUT
2. DISABLE PU AND ENABLE PD
3. READ